




# HFEVC-TY150 HIGH-VOLTAGE CERAMIC CONTACTOR

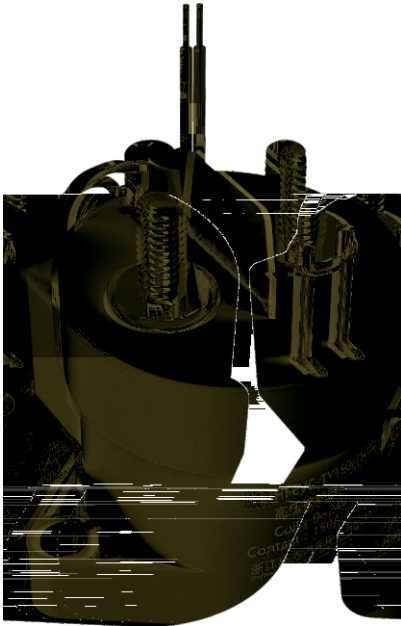

## 产品特性/Product Features

- IP6K9K
- 150A 85°C长时间载流能力
- 12-750VDC
- 1000MΩ (1000VDC) , IEC 60664-1
- PWM
- 
- 
- 



		1a	
		≤0.5m (at 150A)	
		150A	
		2×10 <sup>5</sup>	
		<b>450V型</b>	<b>750V型</b>
		750VDC	750VDC
		1500A(320VDC)1	1500A(320VDC)1
		67.5kW	112.5kW
1)		5×10 <sup>3</sup> 450VDC, 150A	1×10 <sup>3</sup> 750VDC, 150A
		500 450VDC, -150A	500 750VDC, -150A
		1 320VDC, 1000A	1 320VDC, 1000A
2)		150A:	
		200A:10min	
		300A:1min	
		1000A:1s	
辅助接点	Ue	1NO	
		30VDC/125VAC	
		2A DC /3A AC	
		9V0.1A	

1) 23°C, 0.6s:5.4s。

2) 85°C, 50 mm², " "



		1000MΩ(1000VDC)
		3000VAC 1min
		3000VAC 1min
	( )	≤30ms
	( )	≤10ms
		196m/s <sup>2</sup>
		490m/s <sup>2</sup>
		10Hz~500Hz 49m/s <sup>2</sup>
		5%~85%RH
		-40°C~85°C
		/
		400g

VDC	VDC	VDC	W
9~24V	9	≥4.5	
-40°C ~ 85°C)			

/Unit mm



1

[Redacted]				[Redacted]
[Redacted]	[Redacted]	[Redacted]	[Redacted]	

2

50m

3

3mm